

Converter Cord

Catalog No: CC60-480-32-1F


Item No: 0914-01-1F

Features



- Connects 32A reefer container plug to 60A electrical outlets
- UL Listed watertight male plug and female connector
- Custom lengths available upon request
- Wired with SEOOW 10/4 yellow cable

Drawing

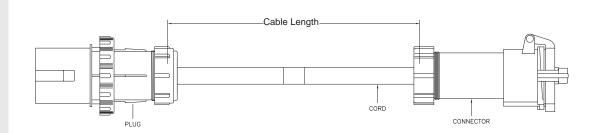

Approvals

- UL/cUL Listed plug
- UL/cUL Listed connectors



Specifications

Catalog No: CC60-480-32-1F

Item No: 0914-01-1F

Electrical	60A 480VAC male plug & 32A 480VAC female connector (380/440VAC 50/60 Hz) 3 phase 3 wire + ground, 3h per IEC 60309-1 & -2
Environmental	Type 4X, IP67 per IEC 529/IEC 60309-1 (with mated plugs and receptacles)
Polyamide	Body, lock ring, gland ring, inner sleeve
Phenolic	Contact carrier
Brass	Contact pins
Polychloroprene	Gaskets
Buna-N (Nitrile/NBR)	O-rings
Polyamide base, silicon seal	Grommet
Rubber	Cable jacket
Product weight	Varies
Shipping weight	Varies
Shipping dimensions	Varies
	Environmental Polyamide Phenolic Brass Polychloroprene Buna-N (Nitrile/NBR) Polyamide base, silicon seal Rubber Product weight Shipping weight