

# INTERLOCKED POWER MODULE

---


## 30AMP 480VAC 3W 4P

Catalog No: R30-480-30-22LDYP-SP

Item No: 1700-76CP



- Heavy Duty Stainless Steel Construction Resists Corrosion & Abuse
- Polyester with Fiberglass Receptacle Resists Corrosion & Abuse
- UL Listed Circuit Breaker Protects Operator & Equipment
- Mates with Crouse-Hinds® NPJ3484 Male Plug

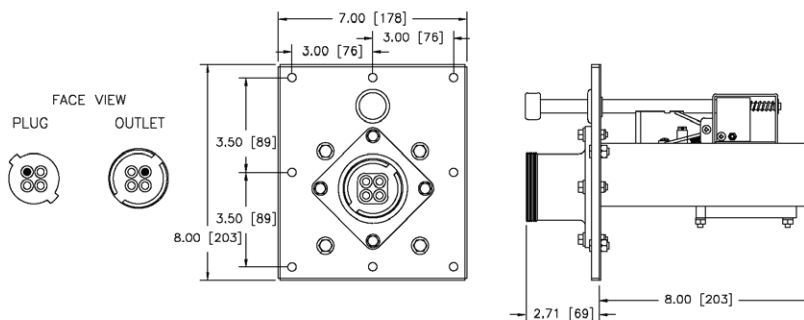

**RATING:**

- Receptacle - Crouse-Hinds® NR342, 30A, 480VAC 3W 4P
- Circuit Breaker - 30A Trip / 22,000AIC @ 480VAC
- Environmental - IP56 per IEC 529  
(Screw Cover) Type 4X capable per NEMA 250, UL 50/508, CSA 22.2
- Terminals - (3) Phase & (1) Ground pressure type screw terminals

**MATERIALS:**

- Stainless Steel - Frame, On/Off Rod, Interlock Mechanism, and all Fasteners
- Polyester w/ Fiberglass - Contact Carrier, Receptacle Housing, Snap Cover
- Brass - Contact Sleeves
- Neoprene (CR) - Gaskets, Cover Seals

**APPROVALS:**

UL/cUL Listed Module • UL 489 Listed / CSA Certified Molded Case Circuit Breaker  
 UL Listed Receptacle

**ACCESSORIES / PARTS**

Description	Item No.	Description	Item No.
• Circuit Breaker	4020-01	• Receptacle & Contact Sleeve Assy	4012-04

**ESL Power Systems, Inc.**

2800 Palisades Drive • Corona, CA 92880-9427  
 Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048

www.eslpwr.com • e-mail: info@eslpwr.com

