

# 21-Gang Power Outlet Assembly

## 32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E21-R32-480-30-22SNC-SP


Item No: 2209-35NA

### Features



- UL Listed 21-gang assembly complete with UL Listed safety-interlocked outlet containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel (powder-coated gray)
- (21) safety-interlocked ESL 32A outlets #1700-18AN furnished with “Power On” indicator lights, auxiliary switch, and type 316 stainless steel receptacle housing. Factory wired to power distribution block (PDB)
- UL Listed circuit breaker rated 22kAIC @ 480VAC provides short circuit & overcurrent protection
- Actuator rod allows user to turn on/off and reset tripped breaker
- Designed for power pack applications
- PDB accepts incoming cable range of (2) #4AWG - 500kcmil per phase line side
- Gasketed bolt-on access cover

### Drawing

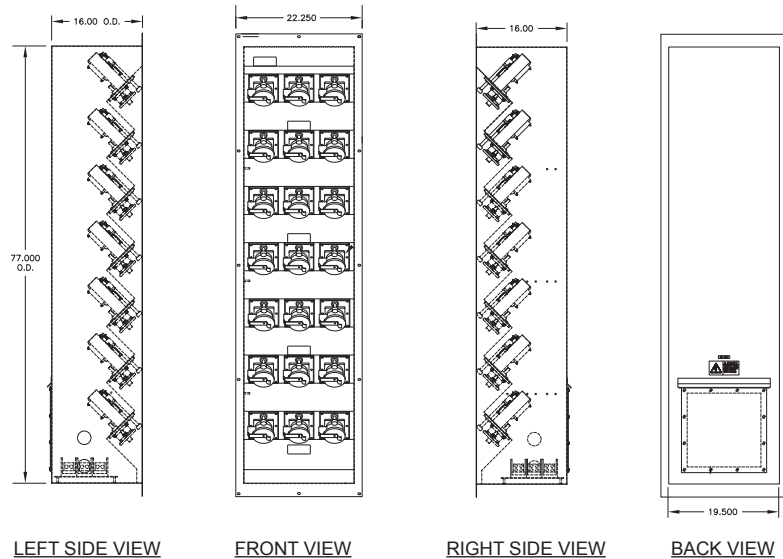

### Approvals

- UL/cUL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breaker

## Specifications

Catalog No: E21-R32-480-30-22SNC-SP

Item No: 2209-35NA

### Ratings

21-Gang assembly	630A 480VAC (380 - 480VAC 50/60hz) 3 phase 3 wire + ground, 22kAIC RMS symmetrical amps
Receptacles	32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2
Circuit breakers	30A trip, 22,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP66
PDB terminals	Line side terminals accept (2) #4 - 500kcmil per phase Ground terminal accepts (12) #14 - #4AWG

### Materials

Stainless steel	Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners
Aluminum	PDB Lugs
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals

### Approximate Weight

Approx. weight	340 lbs.
Approx. shipping weight	380 lbs.

### Replacement Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1700-18AN	Circuit breaker	4020-01
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
Receptacle insert contact sleeve assembly	4010-75	Phase sleeve kit	4015-01