

# Reefer Sharing Unit - Port Terminal

## 32A 480VAC

(32A 380/440VAC 3h per IEC 60309-1 & -2)

Catalog No: RSUWS-32-480-SP-T-4H


Item No: 2213-04SA

### Features



- Power two reefers from one power outlet - alternately powers each container when two reefers are connected. Continuously powers one reefer if only one is connected
- Two high visibility LED lights to indicate which outlet is energized
- Override switch (A-B switch) to manually switch power to either reefer
- Effectively doubles the frozen-load capacity; pays for itself in one ocean crossing
- The (2) interlocked outlets cannot be energized until plug is inserted & the collar is made-up
- Choice of outlet configuration, snap or screw cover, handle or hanger
- Furnished with fixed 4-hour timer (other timer settings available)

### Drawing

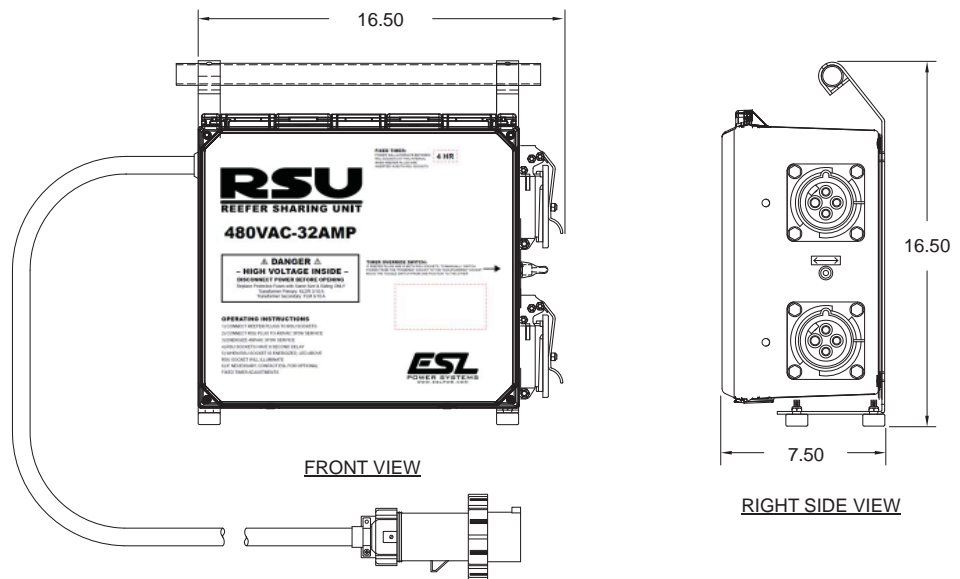

### Approvals

- UL Listed receptacles
- UL Listed plug
- GL Certified

## Specifications

Catalog No: RSUWS-32-480-SP-T-4H

Item No: 2213-04SA

### Ratings

Receptacle	32A 480VAC (380/440VAC 50/60 Hz) 3 phase 3 wire + ground, 3h per IEC 60309-1 & -2
Plug	32A 480VAC pin & sleeve (380/440VAC 50/60 Hz) 3 phase 3 wire + ground, 3h per IEC 60309-1 & -2
Environmental	Type 4X/IP66 (IP67 with optional screw cover or mated plug)

### Components

Enclosure	NEMA 4X fiberglass reinforced polyester
Power connections	Interlocked outlets and male plug as noted in above ratings section, 10' [3m] heavy duty oil & sunlight resistant SOOW 10/4 cord

### Approximate Weight

Approx. weight	23 lbs.
Approx. shipping weight	25 lbs.
Shipping dimensions	17in x 17in x 17in