

# 30-Gang Distribution Tree

## 32/400A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2, CEE 17 3h)

Catalog No: E30-R32-480-30-22SND-SP-222119


Item No: 2221-19

### Features



- UL Listed 30-gang assembly complete with UL Listed safety-interlocked outlets each containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel (powder-coated grey)
- (30) safety-interlocked ESL outlets #1700-56AN factory wired to power distribution block (PDB)
- (3) Sets of 400A Camlock-style receptacles
- UL Listed circuit breaker rated 22kAIC @ 480VAC provides short circuit & overcurrent protection at each outlet
- Each outlet's actuator rod allows user to turn on/off and reset tripped breaker
- (3) Sets of 400A color-coded Camlock-style receptacles for incoming power
- Gasketed bolt-on access cover with drip shield
- Forklift pockets for easy mobility; pockets include anchor bolt holes for permanent installation

### Drawing

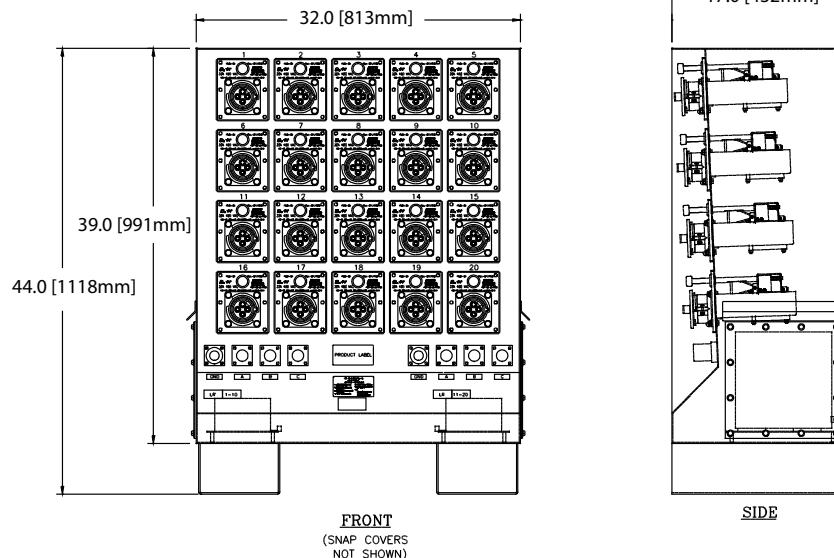

### Approvals

- UL/cUL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breakers

# Specifications

Catalog No: E30-R32-480-30-22SND-SP-222119

Item No: 2221-19

## Ratings

30-Gang assembly	900A 480VAC (440/480VAC 50/60hz) 3 phase 3 wire + ground, 22kAIC RMS symmetrical amps
Receptacles	32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2, CEE 17 3h
Circuit breakers	30A trip, 22,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP66
Input cams	(1 set) Cam-type single pole receptacles, 400A, 600VAC (3 phase + ground) (green, brown, orange, yellow)

## Materials

Stainless steel	Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners
Aluminum	PDB Lugs
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals

## Approximate Weight

Approx. weight	419 lbs.
Approx. shipping weight	459 lbs.

## Replacement

### Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1700-56AN	Circuit breaker	4020-01
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
Receptacle insert contact sleeve assembly	4010-75	Phase sleeve Kit	4015-01
Female Ground Receptacle & Cap (Green)	4010-80FG	Male Phase B Receptacle & Cap (Orange)	4010-80MO
Male Phase A Receptacle & Cap (Brown)	4010-80MH	Male Phase C Receptacle & Cap (Yellow)	4010-80MY
Mating Plug Kit	4120-22		