

# 4-Gang Rack Mount Rear Actuated Assembly

## 32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E4-R32-480-30-22SNEPR1-SP


Item No: 2221-39TR4

### Features



- UL Listed 4-gang rear actuated assembly complete with rear actuated safety-interlocked outlets each containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel (powder-coated grey)
- (4) Rear actuated safety-interlocked ESL outlets #1701-79AN1 factory wired to power distribution block (PDB)
- ON/OFF actuator rod and receptacle located on opposite sides of enclosure ensuring operator is away from the plug and receptacle connection when unit is energized
- UL Listed circuit breaker rated 22kAIC @ 480VAC provides short circuit & overcurrent protection at each outlet
- “Power On” high visibility indicator lights located on module face plate and actuation side
- Each outlet’s actuator rod allows user to turn on/off and reset tripped breaker
- PDB accepts incoming cable range of (1) #6AWG - 350kcmil per phase line side

### Drawing

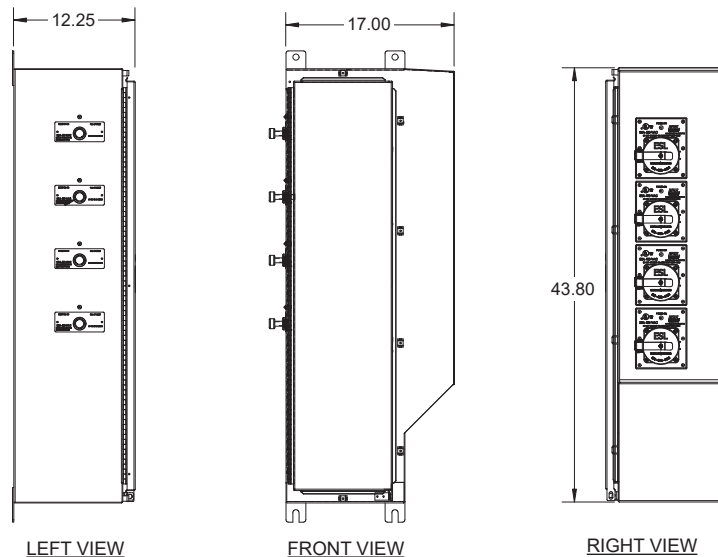

### Approvals

- UL/cUL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breakers

## Specifications

Catalog No: E4-R32-480-30-22SNEPR1-SP

Item No: 2221-39TR4

### Ratings

4-Gang assembly	120A 480VAC (380 - 480VAC 50/60hz) 3 phase 3 wire + ground, 22kAIC RMS symmetrical amps
Receptacles	32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2
Circuit breakers	30A trip, 22,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP66
PDB terminals	Line side terminals accept (1) #6 - 350kcmil per phase Ground terminal accepts (1) #14 - 2/0

### Materials

Stainless steel	Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners
Aluminum	PDB Lugs
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
GP Acetal	Knob, rod seal holder
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals

### Approximate Weight

Approx. product weight	100 lbs.
------------------------	----------

### Replacement Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1701-79AN1	Circuit breaker	4020-01S
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-19
Receptacle insert contact sleeve assembly	4010-75	Phase sleeve kit	4015-01
Insert, contact sleeve & ground assembly	4010-76	Pilot light kit	4090-35GNH