

Stainless Steel Single Gang

32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E1-R32-480-30-35SNQP-SP


Item No: 2263-22ENDW

Features




- UL Listed 1-gang assembly complete with UL Listed safety-interlocked outlet containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel with texture gray powdercoat (RAL 7038)
- Factory installed safety-interlocked ESL outlet #1706-56ANP
- UL Listed circuit breaker rated 35kAIC @ 480VAC provides short circuit & overcurrent protection
- Actuator rod allows user to turn on/off and reset tripped breaker
- Universal mounting – requires (4) fasteners
- Gasketed bolt-on access cover


Drawing

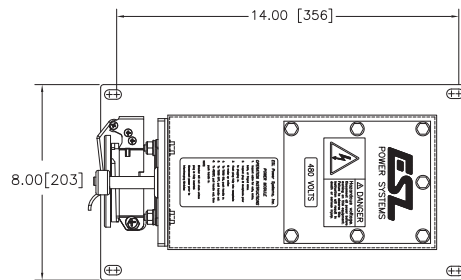


TOP VIEW



FRONT VIEW

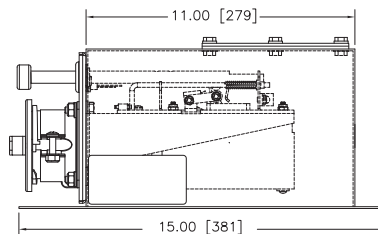

SIDE VIEW

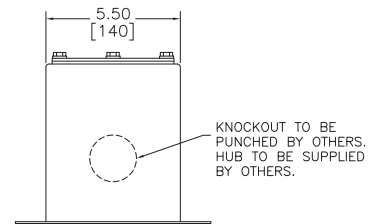

BACK VIEW

Approvals

- UL/cUL Listed modules and assembly
- UL/cUL 489 Listed / CSA certified molded case circuit breakers

Specifications

Catalog No: E1-R32-480-30-35SNQP-SP

Item No: 2263-22ENDW

Ratings

Receptacle	32A 480VAC (380/440VAC 50/60 Hz) 3h 3 phase 3 wire + ground, per IEC 60309-1 & -2
Circuit breaker	30A trip, 35,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP66
Terminal	Installer wires direct to circuit breaker: (3) phase & (1) ground pressure type screw terminals, Phases: #14 - 1/0 AWG (2.1 - 53mm ²) wire range, Ground: #14 - #2 AWG (2.1 - 35mm ²) wire range

Materials

Stainless steel	Enclosure, access cover, outlet frame, on/off rod, interlock mechanism, contact terminal screws & spring, snap cover and all fasteners
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals

Packaging

Product weight	16 lbs.
Shipping weight	17 lbs.
Shipping dimensions	16in x 8in x 8in

Replacement

Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1706-56ANP	Circuit breaker kit	4020-109
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
Replacement receptacle kit	4010-75A	Phase sleeve kit	4015-01
Receptacle insert kit	4010-76A		