

# 4-Gang Bunker Mount

## 32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E4-R32-480-30-35SNQP-SP


Item No: 2283-74-1

### Features




- UL Listed 4-gang assembly complete with UL Listed safety-interlocked outlets each containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel powder-coated texture grey
- (4) safety-interlocked ESL outlets #1706-56ANP factory wired to power distribution block (PDB)
- UL Listed circuit breaker rated 35kAIC @ 480VAC provides short circuit & overcurrent protection at each outlet
- Each outlet's actuator rod allows user to turn on/off and reset tripped breaker
- PDB accepts incoming cable range of (2) #6AWG - 4/0 per phase line side
- Gasketed hinged door with clamps


### Drawing

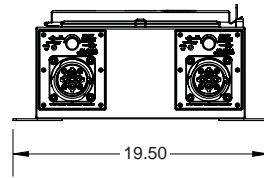


LEFT VIEW

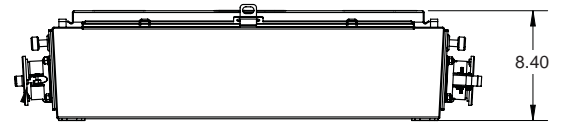

FRONT VIEW

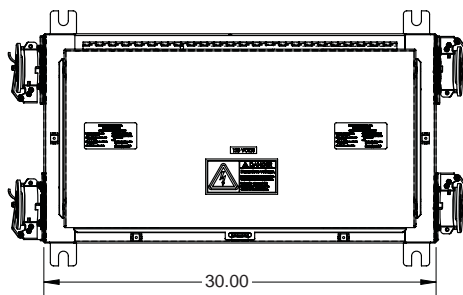

TOP VIEW

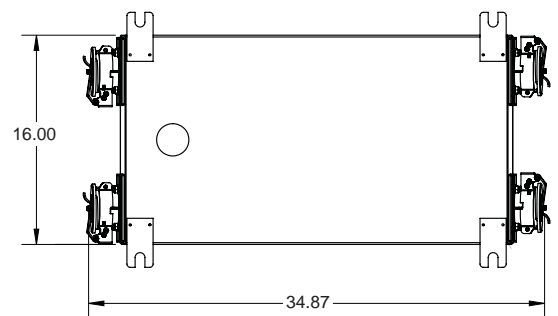

BOTTOM VIEW

### Approvals

- UL/cUL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breakers

## Specifications

Catalog No: E4-R32-480-30-35SNQP-SP

Item No: 2283-74-1

### Ratings

|                  |   |
|------------------|---|
| 4-Gang assembly  | 120A 480VAC (380 - 480VAC 50/60hz) 3 phase 3 wire + ground, 35kAIC RMS symmetrical amps |
| Receptacles      | 32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2                                   |
| Circuit breakers | 30A trip, 35,000AIC @ 480VAC, other trip and AIC ratings available - contact factory    |
| Environmental    | Type 4X/IP66  |
| PDB terminals    | Line side terminals accept (2) #6 - 4/0 per phase<br>Ground terminal accepts #6 - #2/0  |

### Materials

|                      |   |
|----------------------|---|
| Stainless steel      | Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners |
| Aluminum             | PDB Lugs  |
| Nickel plated brass  | Contact sleeves   |
| Rynite®              | Receptacle insert   |
| Polyamide            | Receptacle housing  |
| Buna-N (Nitrile/NBR) | O-rings, gaskets, cover seals   |
| GP Acetal            | Knob, rod seal  |

### Approximate Weight

|                         |         |
|-------------------------|---------|
| Approx. weight          | 80 lbs. |
| Approx. shipping weight | 85 lbs. |

### Replacement Parts

| Description                               | Item No.   | Description       | Item No. |
|---|------------|-------------------|----------|
| Safety-interlocked power outlet           | 1706-56ANP | Circuit breaker   | 4020-109 |
| Stainless steel snap cover assembly       | 1500-01    | Ground sleeve kit | 4016-03  |
| Receptacle insert contact sleeve assembly | 4010-75    | Phase sleeve kit  | 4015-01  |