

# StormSwitch® Manual Transfer Switch

**UL 1008 Listed**


1600A, up to 600VAC  
Series: 3016

## Features



- Quick connect solution for a backup alternate power
- Mechanically interlocked mechanism prevents cross-connecting power sources
- Door & dead front panel for safe alternate power connection and operation
- Primary and alternate power disconnects are 3-pole circuit breakers as standard (optional 4-pole breakers or molded case switches available)
- Type 3R freestanding, double coated, cold-rolled steel enclosure with gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Suitable for Use as Service Equipment (SUSE) option available
- Color-coded series 16 cam style male connectors for easy alternate power connection
- Direct wire connection available for indoor installations (TempTap Generator Docking Station Required)
- Left side wireway extension for bottom conduit entry
- Operating instructions on inside of enclosure
- Hinged plate secures alternate power cord entries when not in use

## Drawing

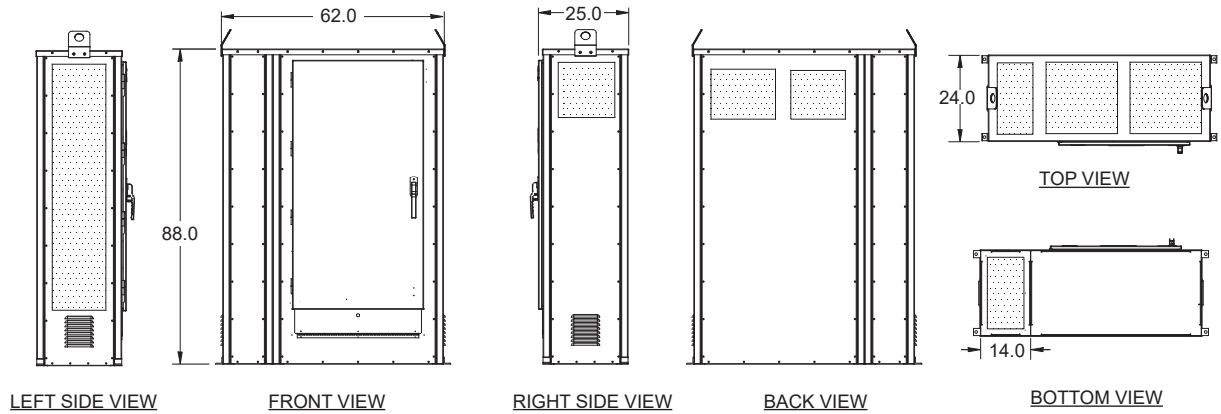

Available incoming conduit entry locations shown shaded

## Approvals

- UL/cUL 1008 Listed assembly
- UL 1691 Listed receptacles
- UL 489 Listed / CSA certified molded case circuit breaker
- UL 1087 Listed molded case switch

# Specifications

**UL 1008 Listed**

## StormSwitch® Manual Transfer Switch Series: 3016

System Voltage	208Y/120 (3-Phases + Neutral + Ground) 208 (3-Phases + Ground) (no Neutral) 240 Delta (3-Phases + Ground) (no Neutral) 240/120 Delta (3-Phases + Neutral + Ground) (High Leg) 480 Delta (3-Phases + Ground) (no Neutral) 480Y/277 (3-Phases + Neutral + Ground) 600 Delta (3-Phases + Ground) (no Neutral) 600Y/347 (3-Phases + Neutral + Ground)	
Disconnect Poles	<b>Standard:</b> 3 Optional: 4	
Assembly Rating	65kAIC @ 240VAC, 35kAIC @ 480VAC with Circuit Breakers (10kA with Switches)	
Trip Type	<b>Standard:</b> LI, Optional: Basic Electronic, LI Ammeter, LSI, LSI Ammeter, LSI Power, LSI Ammeter, LSI Power, Automatic Switch	
Circuit Breaker kAIC/ Interrupting Rating kAIC	<b>Standard:</b> (65@240, 35@480, 18@600) Other options available	
Circuit Breaker Rating	<b>Standard:</b> 80% Rated, Optional: 100% Rated	
Energy Reduction Maintenance Switch	Optional	
Optional Shunt Trip Voltage	12 VDC, 24 VDC, 48 VDC, 125 VDC, 250 VDC, 24 VAC, 48 VAC, 120 VAC, 240 VAC, 277 VAC, 380 VAC, 480 VAC	
Terminals	Disconnect line terminals: (4) 300 - 800kcmil per phase & neutral Load terminals: (4) 300 - 800kcmil per phase & neutral Ground lug: (9) #2 - 600kcmil Other options available	
Disconnect Aux Contact	(1) N.O. / (1) N.C.(standard), (2) N.O. / (2) N.C.(optional)	
Optional Disconnect Bell Alarm	(1) N.O. / (1) N.C.	
Enclosure Material	<b>Standard:</b> Double coated, cold-rolled steel Optional: 304SS, 316SS	
Environmental Rating	<b>Standard:</b> 3R Optional: 3RX for stainless steel	
Enclosure Color Options (additional cost may be required)	<b>Standard:</b> RAL-7035 – Wrinkle Light Gray Optional: RAL-1015 – Wrinkle Light Ivory RAL-1023 – Wrinkle Traffic Yellow RAL-2004 – Wrinkle Pure Orange RAL-3020 – Wrinkle Traffic Red RAL-5002 – Wrinkle Ultramarine Blue	RAL-6024 – Wrinkle Traffic Green RAL-7004 – Wrinkle Signal Gray RAL-7038 – Wrinkle Agate Gray RAL-8017 – Wrinkle Chocolate Brown RAL-9003 – Wrinkle Signal White RAL-9005 – Wrinkle Jet Black
Optional Accessories	Pilot Light - Primary Source (Red) Pilot Light - Primary Source (Green) Pilot Light - Alternate Source (Red) Pilot Light - Alternate Source (Green) Infrared Window Phase Monitor Remote Start: 4 Point TB ERMS (energy reduction maintenance switch)	Surge Protection Device (SPD) Heater/Thermostat/De-Humidistat Receptacle - 20A, 120V Duplex Receptacle - 20A, 120V GFCI Duplex Receptacle - 20A, 120V Twist Lock Receptacle - 30A, 120V Twist Lock Receptacle - 20A, 120V Straight Blade
Standard Accessories	Phase Monitor Remote Start 3 Point TB	
Side Wireways	Left Side Effective Conduit Area (20"D x 10"W) Other options available	
Service Entrance Rating	Yes as an option	
Aproximate Product Weight:	1600 lbs.	
Aproximate Shipping Weight:	1680 lbs.	

Note: Most Options have an additional cost.