

Watertight Female Cord Connector

50A 240VAC

Catalog No: E534FC


Item No: 1900-04P

Features



- In-line female cord connector
- Heavy duty watertight design for marine environment
- One termination set screw per pole in backloaded contact carrier for easy assembly

Drawing

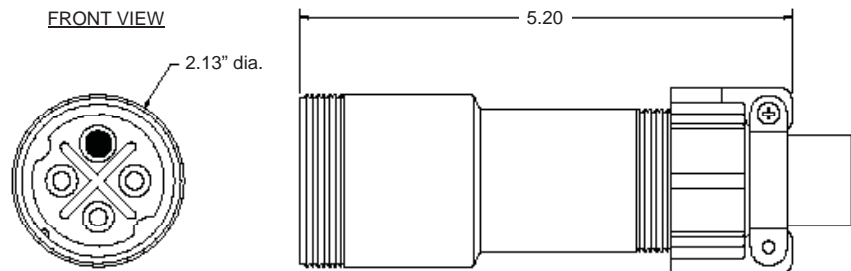

Specifications

Catalog No: E534FC

Item No: 1900-04P

Ratings

Electrical	50A 240VAC pin & sleeve 3 phase 3 wire + ground
------------	---

Cable range	0.67-0.75in (17 - 19mm) diameter
-------------	----------------------------------

Environmental	Watertight
---------------	------------

Terminals	(3) Phase & (1) ground pressure type M6 screw terminals (1 per pole) accept #8 - #6 AWG (4-6mm ²) conductors
-----------	---

Materials

Polyamide	Gland ring, inner sleeve
-----------	--------------------------

Phenolic	Insert
----------	--------

Brass	Contact pins
-------	--------------

Polychloroprene	Gaskets
-----------------	---------

Buna-N (Nitrile/NBR)	O-rings
----------------------	---------

Neoprene	Grommet
----------	---------

Stainless steel	Gland clamp
-----------------	-------------

Polycarbonate	Body
---------------	------

Packaging

Approx. product weight	1 lb. (ea)
------------------------	------------

Approx. shipping weight	10 lbs. (carton of 10)
-------------------------	------------------------

Approx. shipping dimensions	17in x 8in x 8in (carton of 10)
-----------------------------	---------------------------------