## ShowSwitch<sup>™</sup> Company Switch






200A 208Y/120VAC Catalog No: CS23-200C-208Y/120-65-311-LS-CW1 Item No: 3323-01

**Features** 



- UL Listed company switch assembly with safety-interlocked integral 200A circuit breaker
- Type 1 wall mount 14ga powder coated wrinkle black steel enclosure
- Safety-interlocked door for safe connection, operation, and maintenance
- Color-coded cam-style receptacles nested in interior chamber
- Red lights indicate phase voltage is present at cable connections
- Recessed padlockable operator handle
- Padlockable door
- UL Listed molded case main circuit breaker protects operator & equipment

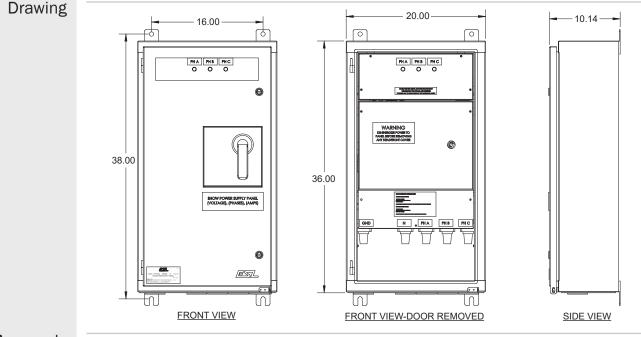

Approvals

- UL/cUL 891 Listed assembly
- UL/cUL Listed cam-type receptacles
- UL 489 Listed / CSA certified molded case circuit breaker

ESL Power Systems, Inc. | 2800 Palisades Dr. | Corona, CA 92878 | 800.922.4188 | +1.951.739.7000 | www.eslpwr.com | info@eslpwr.com



## Specifications

	Catalog No: CS23-200C-208Y/120-65-311-LS-CW1 Item No: 3323-01	
Ratings		
	Receptacles	400A 600VAC rated single pole color-coded series 16 cam-style female black/red/blue phase receptacles, female white neutral receptacle and female green ground receptacle
	Circuit breaker	200A Trip, 3P 65kAIC @ 240VAC (80% rated)
	Terminals	Breaker Line Terminals: 3/0 - 350kcmil (other options available) Ground Lug - #6 - 250kcmil Neutral Lug - #6 - 250kcmil
Packaging		
	Approx. product weight	100 lbs.
	Approx. shipping weight	135 lbs. (palletized)
Options	Shipping dimensions	40 x 48 x 18
	<ul> <li>480Y/277VAC</li> <li>Type 3R</li> <li>Dual neutral</li> <li>Direct wire connection chamber</li> <li>100% rated circuit breaker</li> <li>Stainless steel enclosure</li> <li>Flush mount, pad mount</li> <li>Isolated ground</li> <li>Choice of exterior color</li> <li>Ammeter</li> <li>Connection chamber light</li> <li>Leg assembly</li> <li>Reverse gender receptacle</li> </ul>	

ESL Power Systems, Inc. | 2800 Palisades Dr. | Corona, CA 92878 | 800.922.4188 | +1.951.739.7000 | www.eslpwr.com | info@eslpwr.com