## ShowSwitch<sup>™</sup> Company Switch






400A 208Y/120VAC Catalog No: CS43-400C-208Y/120-65-311-LS-CW1 Item No: 3343-01

Features



- UL Listed company switch assembly with safety-interlocked integral 400A circuit breaker
- Type 1 wall mount 14ga powder coated wrinkle black steel enclosure
- Safety-interlocked door for safe connection, operation, and maintenance
- Color-coded cam-style receptacles nested in interior chamber
- Red lights indicate phase voltage is present at cable connections
- Recessed padlockable operator handle
- Padlockable door
- UL Listed molded case main circuit breaker protects operator & equipment

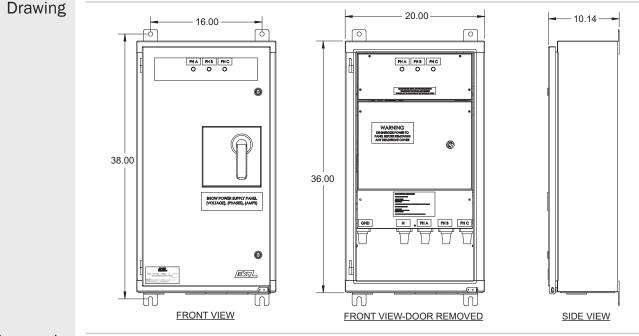

Approvals

- UL/cUL 891 Listed assembly
- UL/cUL Listed cam-type receptacles
- UL 489 Listed / CSA certified molded case circuit breaker

ESL Power Systems, Inc. | 2800 Palisades Dr. | Corona, CA 92878 | 800.922.4188 | +1.951.739.7000 | www.eslpwr.com | info@eslpwr.com



## Specifications

|           | Catalog No: CS43-400C-208Y/120-65-311-LS-CW1<br>Item No: 3343-01   |   |
|-----------|--|---|
| Ratings   |  |   |
|           | Receptacles  | 400A 600VAC rated single pole color-coded series 16 cam-style female black/red/blue phase receptacles, female white neutral receptacle and female green ground receptacle |
|           | Circuit breaker  | 400A Trip, 3P 65kAIC @ 240VAC (80% rated)   |
|           | Terminals  | Breaker Line Terminals: (2) 2/0-500kcmil (other options available)<br>Ground Lug - #6 - 250kcmil<br>Neutral Lug - #6 - 250kcmil   |
| Packaging |  |   |
|           | Approx. product weight   | 100 lbs.  |
|           | Approx. shipping weight  | 135 lbs. (palletized)   |
| Options   | Shipping dimensions  | 40 x 48 x 18  |
|           | <ul> <li>480Y/277VAC</li> <li>Type 3R</li> <li>Dual neutral</li> <li>Direct wire connection chamber</li> <li>100% rated circuit breaker</li> <li>Stainless steel enclosure</li> <li>Flush mount, pad mount</li> <li>Isolated ground</li> <li>Choice of exterior color</li> <li>Ammeter</li> <li>Connection chamber light</li> <li>Leg assembly</li> <li>Reverse gender receptacle</li> </ul> |   |

ESL Power Systems, Inc. | 2800 Palisades Dr. | Corona, CA 92878 | 800.922.4188 | +1.951.739.7000 | www.eslpwr.com | info@eslpwr.com